


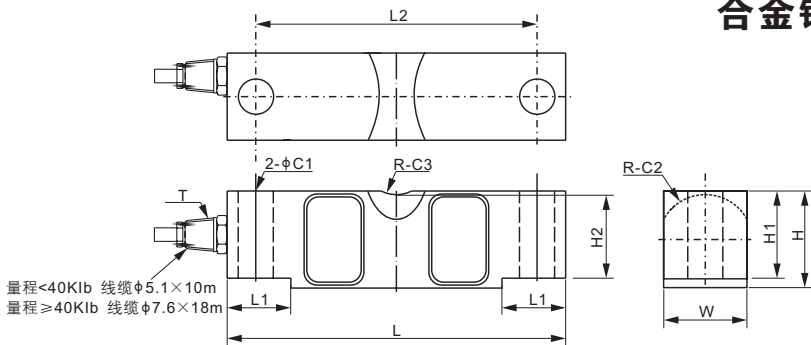

尺寸

| 量程                | C1   | C2   | C3   | H    | H1   | H2   | L     | L1   | L2    | W    | T          |
|-------------------|------|------|------|------|------|------|-------|------|-------|------|------------|
| <b>Klb/inches</b> |      |      |      |      |      |      |       |      |       |      |            |
| 10-25             | 0.68 | 0.90 | 0.75 | 1.94 | 1.70 | 1.63 | 7.75  | 1.38 | 6.50  | 1.69 | 1/4-18 NPT |
| 40                | 0.81 | 1.12 | 0.98 | 2.44 | 2.10 | 2.03 | 10.25 | 1.93 | 8.50  | 1.94 | 1/2-14 NPT |
| 50-75             | 1.06 | 1.38 | 0.98 | 2.94 | 2.65 | 2.53 | 10.25 | 1.93 | 8.50  | 2.44 | 1/2-14 NPT |
| SE100             | 1.06 | 1.38 | 0.98 | 3.44 | 2.65 | 2.53 | 10.25 | 1.93 | 8.50  | 2.44 | 1/2-14 NPT |
| 100-125           | 1.62 | 1.80 | 1.50 | 3.86 | 3.43 | 3.30 | 15.25 | 3.13 | 12.75 | 2.90 | 1/2-14 NPT |
| 200               | 1.62 | 2.37 | 2.00 | 5.80 | 5.12 | 4.44 | 19.25 | 4.00 | 15.25 | 3.80 | 1/2-14 NPT |
| 300               | 2.12 | 4.00 | 2.50 | 5.80 | 5.12 | 4.44 | 22.00 | 5.00 | 17.00 | 5.80 | 1/2-14 NPT |
| 400               | 2.12 | 5.00 | 3.00 | 5.80 | 5.12 | 4.44 | 22.00 | 5.00 | 17.00 | 5.80 | 1/2-14 NPT |
| <b>t/mm</b>       |      |      |      |      |      |      |       |      |       |      |            |
| 5-15              | 17.3 | 22.9 | 19.1 | 49.3 | 43.2 | 41.5 | 196.9 | 35.1 | 165.1 | 42.9 | 1/4-18 NPT |
| 20                | 20.5 | 28.4 | 25.0 | 62.0 | 53.4 | 51.6 | 260.4 | 49.0 | 216.0 | 49.3 | 1/4-18 NPT |
| 25-35             | 27.0 | 35.0 | 25.0 | 74.6 | 67.2 | 64.3 | 260.4 | 49.0 | 216.0 | 62.0 | 1/2-14 NPT |
| 50                | 41.2 | 45.7 | 38.1 | 98.0 | 87.1 | 83.8 | 387.4 | 79.5 | 323.9 | 73.7 | 1/2-14 NPT |

| 技术参数 |                  |          |                             |
|------|------------------|----------|-----------------------------|
| 灵敏度  | 3.0 mV/V ± 0.25% | 额定激励电压   | 10V (15V 最大)                |
| 零位输出 | ± 0.02 mV/V      | 绝缘阻抗     | >2 [ 50V DC ] GΩ            |
| 非线性  | < ± 0.023%       | 正常工作温度范围 | -10°C - 50°C / 14°F - 122°F |
| 重复性  | < ± 0.017%       | 安全极限载荷   | 150% 满量程                    |
| 滞后误差 | < ± 0.023%       | 破坏极限载荷   | 300% 满量程                    |
| 蠕变   | < ± 0.023%       | 密封方式     | 密封 / IP67                   |
| 输入阻抗 | 700 Ω ± 10       | 接线方式     | Exc+ 红    Exc- 黑            |
| 输出阻抗 | 700 Ω ± 5        |          | Sig+ 绿    Sig- 白            |
| 原材料  | 合金钢              |          | 屏蔽线                         |

| 货 号*          |                     |        |
|---------------|---------------------|--------|
| 量程            | 货号                  | 毛重(kg) |
| 10Klb.....    | 102BH-10Klb.....    | 2.9    |
| 20Klb.....    | 102BH-20Klb.....    | 3.0    |
| 25Klb.....    | 102BH-25Klb.....    | 3.0    |
| 40Klb.....    | 102BH-40Klb.....    | 7.0    |
| 50Klb.....    | 102BH-50Klb.....    | 9.0    |
| 60Klb.....    | 102BH-60Klb.....    | 9.0    |
| 75Klb.....    | 102BH-75Klb.....    | 9.0    |
| SE100Klb..... | 102BH-SE100Klb..... | 10.0   |
| 100Klb.....   | 102BH-100Klb.....   | 20.5   |
| 125Klb.....   | 102BH-125Klb.....   | 20.5   |
| 200Klb.....   | 102BH-200Klb.....   | 47.0   |
| 300Klb.....   | 102BH-300Klb.....   | 75.0   |
| 400Klb.....   | 102BH-400Klb.....   | 80.5   |

|                               |                     |     |
|-------------------------------|---------------------|-----|
| <b>密封 (IP68) &amp; 防雷保护版:</b> |                     |     |
| 60Klb.....                    | 102BH-60Klb-02..... | 9.0 |
| 75Klb.....                    | 102BH-75Klb-02..... | 9.0 |

SE: 小型

\* ATEX, FM, IECEx 认证版本货号带有“-Ex”后缀

| 货 号*     |                |        |
|----------|----------------|--------|
| 量程       | 货号             | 毛重(kg) |
| 5t.....  | 102BH-5t.....  | 3.0    |
| 10t..... | 102BH-10t..... | 3.0    |
| 15t..... | 102BH-15t..... | 3.0    |
| 20t..... | 102BH-20t..... | 7.0    |
| 25t..... | 102BH-25t..... | 9.0    |
| 30t..... | 102BH-30t..... | 9.0    |
| 35t..... | 102BH-35t..... | 9.0    |
| 50t..... | 102BH-50t..... | 20.5   |

| 可配套模块         |     |
|---------------|-----|
| 型号            | 页码  |
| 102BHM1 ..... | 144 |

25Klb-125Klb: NTEP 1:10 000 Class IIIIL, Multiple Cell

11t-55t: OIML MAA C3, Y=7500