





- 特点:
- 与柱式传感器106RS配套使用
 - 量程: 30t-100t
 - 中心自动复位, 内置反升力结构
 - 预留更换传感器时安全保护孔
 - 可选配动态称重的横向拉杆

称重传感器获得:

  **CE RoHS**

OIML & NTEP 认证不含100t

模块不含称重传感器。

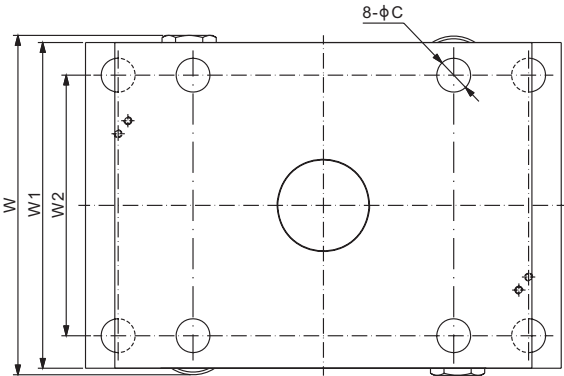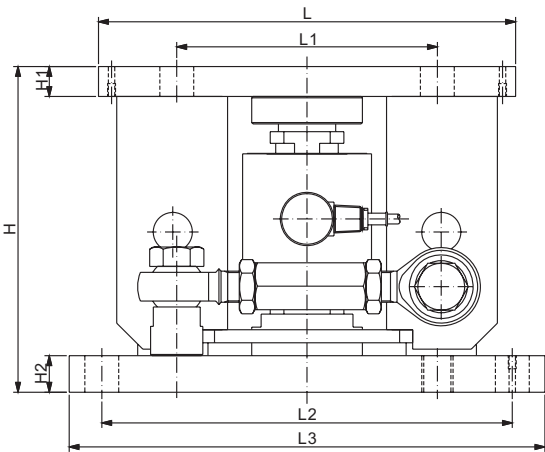

尺 寸

量程	C	H	H1	H2	L	L1	L2	L3	W	W1	W2
t/mm											
30-40	26.0	235.0	23.0	28.0	250.0	200.0	315.0	365.0	260.0	250.0	200.0
50	26.0	250.0	23.0	28.0	250.0	200.0	315.0	365.0	260.0	250.0	200.0
100	32.0	329.5	30.0	33.0	300.0	235.0	375.0	440.0	320.0	300.0	235.0
Klb/inches(由上述尺寸转换)											
66.14-88.18	1.02	9.25	0.91	1.10	9.84	7.87	12.40	14.37	10.24	9.84	7.87
110.23	1.02	9.84	0.91	1.10	9.84	7.87	12.40	14.37	10.24	9.84	7.87
220.46	1.26	12.97	1.18	1.30	11.84	9.25	14.76	17.32	12.60	11.81	9.25

货 号

量程	货号	毛重(kg)
30t-40t.....	106RSM1-(30-40)t.....	-
50t.....	106RSM1-50t.....	-
100t.....	106RSM1-100t.....	-