


不锈钢

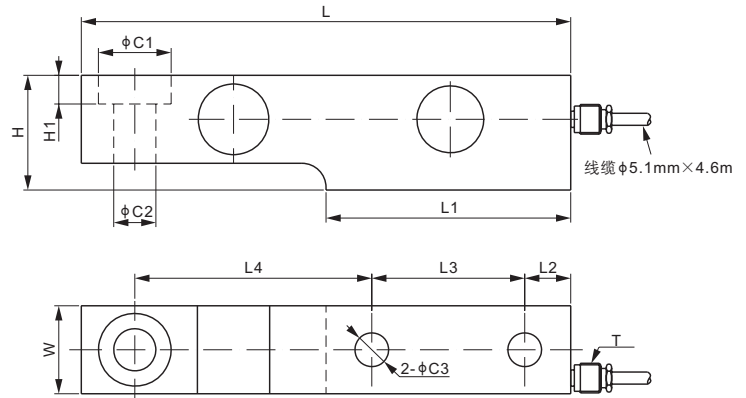

尺寸

量程	C1	C2	C3	H	H1	L	L1	L2	L3	L4	W	T
Klb/inches												
1-5	1.19	0.69	0.55	1.87	0.47	8.00	4.00	0.75	2.50	3.87	1.44	-
10	1.63	1.00	0.88	2.75	0.62	9.25	4.62	0.81	2.63	4.88	1.88	1/4-18 NPT
kg/mm (由上述尺寸转换)												
454-2,268	30.2	17.5	14.0	47.6	11.9	203.2	101.6	19.1	63.5	98.4	36.5	-
4,536	41.4	25.4	22.4	69.9	15.8	235.0	117.3	20.6	66.8	124.0	47.8	1/4-18 NPT

技术参数			
灵敏度	2.0 mV/V ± 1%	额定激励电压	10V (15V 最大)
零位输出	± 0.02 mV/V	绝缘阻抗	>2 [50V DC] GΩ
非线性	< ± 0.023%	正常工作温度范围	-10°C - 50°C / 14°F - 122°F
重复性	< ± 0.023%	安全极限载荷	150% 满量程
滞后误差	< ± 0.023%	破坏极限载荷	300% 满量程
蠕变	< ± 0.030%	密封方式	焊封 / IP68
输入阻抗	350 Ω ± 7	接线方式	Exc+ 红 Exc- 黑
输出阻抗	350 Ω ± 3		Sig+ 绿 Sig- 白
原材料	17-4PH 不锈钢		屏蔽线

货 号*

量程	货号	毛重(kg)
1Klb.....	563YSRS-1Klb.....	2.2
2Klb.....	563YSRS-2Klb.....	2.2
5Klb.....	563YSRS-5Klb.....	2.5
10Klb.....	563YSRS-10Klb.....	-

* ATEX, FM, IECEx 认证版本货号带有“-Ex”后缀



1Klb-2Klb: NTEP 1: 5 000 Class III, Single Cell;
NTEP 1: 9 500 Class III, Multiple Cell;
5Klb-10Klb: NTEP 1: 6 000 Class III, Single Cell;

NTEP 1: 10 000 Class III, Multiple Cell



2Klb-5Klb: OIML MAA C5, Y=26 000;
10Klb: OIML MAA C6, Y=8 500