


合金钢

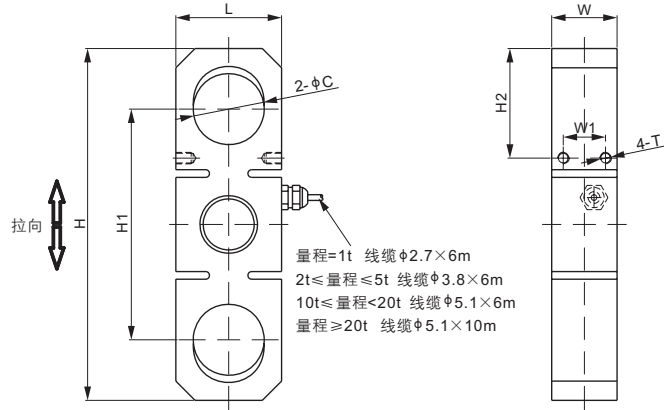

尺寸

量程	C	H	H1	H2	L	W	W1	T	建议匹配卸扣
t/mm									
1	15.0	74.0	49.5	20.5	20.0	12.0	7.0	4-M3 深 5	RBXS-1t 或 TBX-2t
2	20.0	109.5	75.5	30.5	28.0	15.0	8.0	4-M3 深 5	SBX-3.25t
5	27.0	140.0	93.0	41.0	38.0	25.0	15.0	4-M4 深 5	SBX-6.5t
10	37.0	183.0	120.0	57.0	55.0	34.0	22.0	4-M6 深 8	SBX-12t
20	53.0	252.0	164.0	82.0	74.0	50.0	30.0	4-M6 深 8	SBX-25t
30	60.0	307.5	202.0	93.0	86.0	60.0	40.0	4-M8 深 12	SBX-35t
50	73.0	390.0	257.0	116.0	110.0	75.0	40.0	4-M12 深 20	SBX-55t
75	88.0	486.0	324.0	147.0	135.0	90.0	60.0	4-M12 深 20	SBX-85t
100	102.0	580.0	389.0	172.0	160.0	100.0	60.0	4-M12 深 20	SBX-120t
120	102.0	580.0	389.0	172.0	160.0	120.0	60.0	4-M12 深 20	SBX-120t
lb/inches (由上述尺寸转换)									
2,204.6	0.59	2.91	1.95	0.81	0.79	0.47	0.28	4-M3 深 0.20	RBXS-1.5t
4,409.2	0.79	4.31	2.97	1.20	1.10	0.59	0.31	4-M3 深 0.20	SBX-3.5t
11,023.1	1.06	5.51	3.66	1.61	1.50	0.98	0.59	4-M4 深 0.20	SBX-6.5t
22,046.2	1.46	7.20	4.72	2.24	2.17	1.34	0.87	4-M6 深 0.31	SBX-12t
44,092.5	2.09	9.92	6.46	3.23	2.91	1.97	1.18	4-M6 深 0.31	SBX-25t
66,138.7	2.36	12.11	7.95	3.66	3.39	2.36	1.57	4-M8 深 0.47	SBX-35t
110,231.1	2.87	15.35	10.12	4.57	4.33	2.95	1.57	4-M12 深 0.79	SBX-55t
165,346.7	3.46	19.13	12.76	5.79	5.31	3.54	2.36	4-M12 深 0.79	SBX-85t
220,462.2	4.02	22.83	15.31	6.77	6.30	3.94	2.36	4-M12 深 0.79	SBX-120t
264,554.7	4.02	22.83	15.31	6.77	6.30	4.72	2.36	4-M12 深 0.79	SBX-120t

技术参数

灵敏度	3.0 mV/V ± 10%	额定激励电压	10V (15V 最大)
零位输出	± 0.02 mV/V	绝缘阻抗	> 2 [50V DC] GΩ
非线性	< ± 0.017% FS	正常工作温度范围	-10°C - 50°C / 14°F - 122°F
重复性	< ± 0.017% FS	安全极限载荷	150% 满量程
滞后误差	< ± 0.017% FS	破坏极限载荷	400% 满量程
蠕变	< ± 0.023% FS	密封方式	密封 / IP67
输入阻抗	400 Ω ± 20	接线方式	Exc+ 红 Exc- 黑
输出阻抗	350 Ω ± 3		Sig+ 绿 Sig- 白
原材料	合金钢		屏蔽线

货 号*

量程	货号	毛重(kg)
1t.....	110BH-1t.....	0.2
2t.....	110BH-2t.....	0.4
5t.....	110BH-5t.....	0.8
10t.....	110BH-10t.....	2.4
20t.....	110BH-20t.....	5.4
30t.....	110BH-30t.....	9.3
50t.....	110BH-50t.....	22.0
75t.....	110BH-75t.....	35.4
100t.....	110BH-100t.....	54.8
120t.....	110BH-120t.....	61.0

可配套模块

型号	页码
110BHM3.....	161

* ATEX, FM, IECEx 认证版本货号带有“-Ex”后缀



1t-2t: NTEP 1:3 000 Class III, Single Cell;
NTEP 1:5 000 Class III, Multiple Cell;
5t-50t: NTEP 1:3 000, 可达 1:6 000 Class III, Single Cell and Multiple Cell



1t-10t: OIML MAA C3, Y=15 000
10t-50t: OIML MAA C3, 可达 C6, Y=13 500