

不锈钢






- 特点：
- 与悬臂梁式称重传感器563YS配套使用
 - 量程：500lb-15Klb/250kg-10t
 - 反升力及防过载保护
 - 摆柱受力设计
 - 侧挡块装配设计

称重传感器获得：



模块不含称重传感器。

称重模块

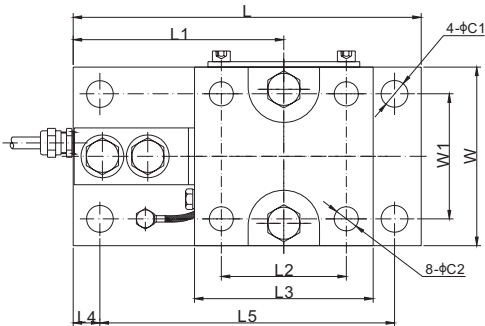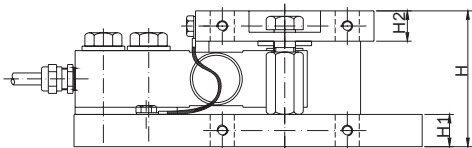

尺 寸

量程	C1	C2	H	H1	H2	L	L1	L2	L3	L4	L5	W	W1
lb/inches													
500-4,000;SE5,000	0.59	0.53	2.99	0.71	0.67	7.68	4.65	2.76	3.94	0.59	6.50	3.94	2.76
5,000-10,000	0.71	0.59	4.33	1.06	0.98	9.57	6.00	3.35	4.72	0.75	8.07	4.72	3.35
15,000	0.87	0.79	5.73	1.42	1.26	12.52	7.76	4.09	5.98	1.00	10.52	5.98	4.09
kg/mm													
250-2,000	15.0	13.5	76.0	18.0	17.0	195.0	118.0	70.0	100.0	15.0	165.1	100.0	70.0
3,000-5,000	18.0	15.0	110.0	27.0	25.0	243.0	152.5	85.0	120.0	19.0	205.0	120.0	85.0
10,000	22.0	20.0	145.5	36.0	32.0	318.0	197.0	104.0	152.0	25.4	267.2	152.0	104.0

货 号

量程	货号	毛重(kg)
500lb-SE5Klb.....	563YSM3-(0.5-SE5)Klb-02.....	4.2
5Klb-10Klb.....	563YSM3-(5-10)Klb-02.....	9.5
15Klb.....	563YSM3-15Klb-02.....	22.0
250kg-2t.....	563YSM3-(250kg-2t)-02.....	4.2
3t-5t.....	563YSM3-(3-5)t-02.....	9.5
10t.....	563YSM3-10t-02.....	22.0